


Aluminum Punkah Louver - Diffusing Round Duct Series

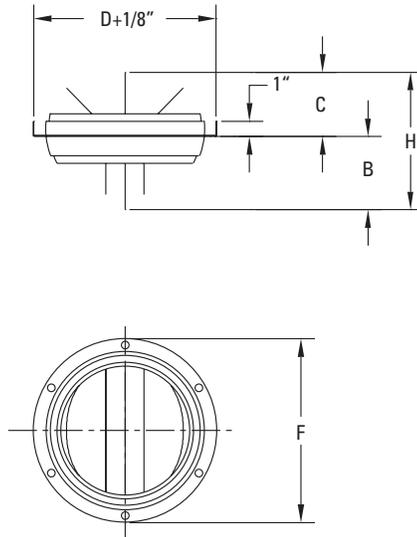

High Velocity Task Air Outlet

- Low Noise Levels
- Low Pressure Requirements

Adjustability

- Easy Finger Tip Adjustment
- Directional Air Pattern Control:
70 Degree Global Rotation Minimum
±35 Degree Deflection
360 Degree Rotation
- The Spherical Core Can Be Easily Adjusted
To Provide a Jet Air Pattern or Diffused Air Pattern

Installation

- Mounts Cleanly to Exposed Ductwork

MODEL	Size	B	C	D	F	H
APLD-08-RD	8	3-5/8	3-5/8	10	10	7-1/4
APLD-10-RD	10	4-5/8	4-5/8	12	12	9-1/4
APLD-12-RD	12	5-3/8	5-3/8	14	14	10-3/4

(Inches measured to the nearest 1/16")

Standard Material

- Heavy Gauge Aluminum

Options

- Custom Finish _____

Notes

- Frame Slides Cleanly Over End of Exposed Ductwork
- Mounting Screws Included
- US Patent Pending

Standard Finishes

- #00 mill
- #12 anodized powder coat
- #42 gloss black powder coat
- #43 flat black powder coat
- #52 white powder coat
- #62 grey primer powder coat (on field painting)
- #72 silver metallic powder coat
- #99 custom color / color match (paint chip needed)

Project :	<h2>APLD Series</h2> <p>Aluminum Punkah Louver - Diffusing Round Duct Series</p>	
Architect :		
Engineer :		
Contractor :		
Submitted By :	Date :	Form # : 20031S
		Drawn By : MH January 2005